



Wineblock
- Split units
for high
temperature
refrigeration
with humidifier
kit included
WINEBLOCK SB.LBC




Reciprocating compressor

Compact condensing unit and small-sized wall or ceiling mounted evaporators

- › Accurate humidity and temperature control to guarantee the quality of products (e.g. wines)
- › Thermostatic expansion valve ensuring optimum capacity in accordance with the required load for better energy efficiency
- › Integrated humidifier available depending on model to have one unit which covers it all: perfect humidity & temperature control
- › Electronic controller managing both temperature and humidity of the cold room


Wineblock SB.LBC

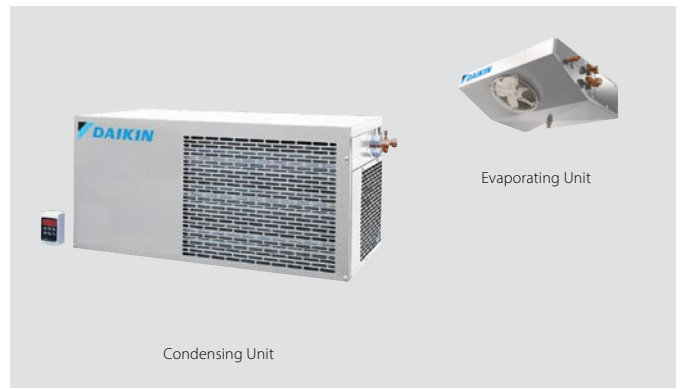

SB.LBCWHD-AV30DR/ AV31DR				030	050	060	075	
Refrigerating capacity	High temperature	R-134a	Nom	kW	0.60 (1)	1.00 (1)	1.40 (1)	2.00 (1)
Heating capacity	R-134a	Nom		kW	0.90		1.60	
Power input	Max.			W	1.42	1.55	2.44	2.55
Dimensions	Condensing unit	Height x Width x Depth	mm		357 x 682 x 337		390 x 882 x 427	
	Evaporator unit	Height x Width x Depth	mm		215 x 669 x 490		215 x 1,089 x 490	
	Packed condensing unit	Height x Width x Depth	mm		590 x 400 x 800		610 x 510 x 1,000	
	Packed evaporator unit	Height x Width x Depth	mm		540 x 250 x 1,190			
Weight	Condensing unit		kg		33	36	61	63
	Evaporator unit		kg		13		19	
	Packed condensing unit		kg		38	41	68	70
	Packed evaporator unit		kg		14.5		22	
Compressor	Type			Hermetic Reciprocating				
Operation range	Cold room temperature	Min. ~Max.	°C	10 ~20				
	Ambient temperature	Min. ~Max.	°C	10 ~40				
Refrigerant	Type			R-134a				
	GWP			1,430				
Evaporator	Air flow		m ³ /h	600			1,200	
Condenser	Air flow		m ³ /h	600			1,200	
Defrost				Air				
Power supply	Voltage/Phase/Frequency		V/Hz	230/1~/50				
Range RH%			%	60-80				

(1) When normally running: +14°C / +30°C | Contains fluorinated greenhouse gases

Daikin Europe N.V. Naamloze Vennootschap · Zandvoordestraat 300 · 8400 Oostende · Belgium · www.daikin.eu · BE 0412 120 336 · RPR Oostende (Responsible Editor)



ECPEN18-835

04/18



The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.